



RASOPLAN **R**
Reversible

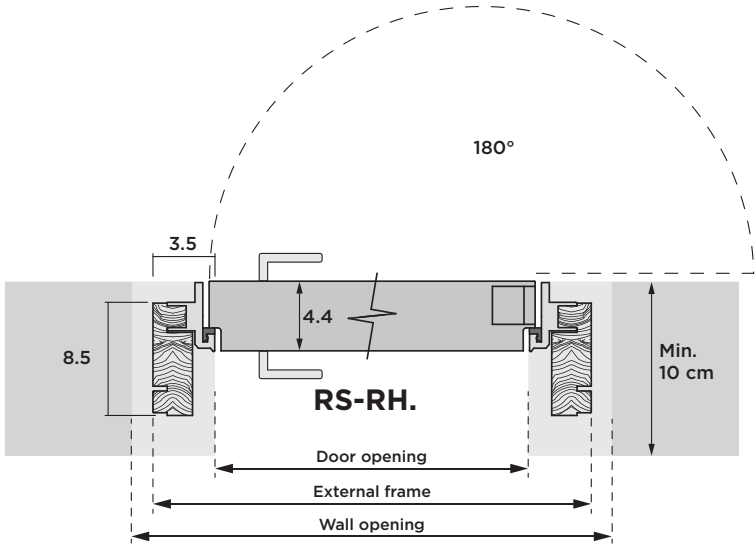


Aluminum frame,
wooden counterframe

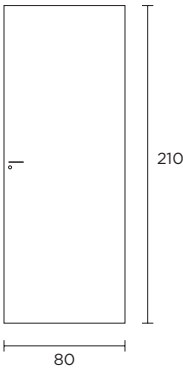


Concealed invisible
hinges in satin chrome
finish, 3D adjustable

RF - FLUSH PUSHING

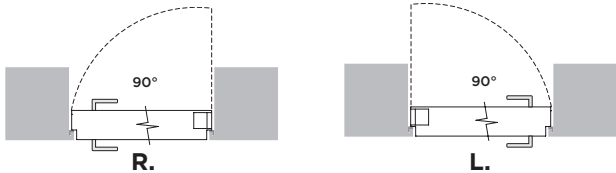

RS - STANDARD

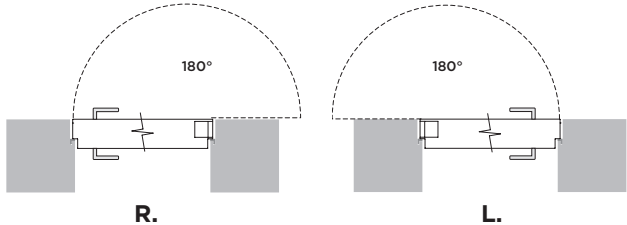

DIMENSIONS STANDARD

	Widths					Heights		Thickness
Wall opening	70	80	85	90	100	205	215	min. 10
External frame	68	78	83	88	98	204	214	min. 10
Door opening light	60	70	75	80	90	200	210	min. 10

PANEL

44 mm thickness hollow core panel, finger joint fir wood perimeter frame with inner honeycomb core. Panel with stop moulding on two sides, edge-finished on four sides, finished with primer for painting, or laminate, cashmere or lacquered.

FRAME

Made of primed anodized aluminium with 35 mm thickness fir wood counter frame. Can be installed on plasterboard and plaster.

OPENINGS

Reversible in heights 200 and 210.
Not available H lower than 200.

HARDWARE

Concealed invisible hinges in satin chrome finish, 3D adjustable.

DOOR LOCK

Mediana magnetic lock, endcoding key “11”, matt chrome finish with Venusdesign logo for swing version.

GASKETS

Perimetric laminate acoustic memory foam gasket of same color

DELIVERY

The item is delivered complete with door panel, aluminum frame and wooden frame in standard sizes. Separate deliveries have to be planned.

RASOPLAN FOR PLASTER

Angles, grids and fixing systems are not supplied.

TEAMING

We recommend squaring the frame with the help of the panel.